**Technical Data:****Boom M 42**

Horizontal reach	38 m
Vertical height	41.7 m
Reach depth	29.4 m
Slewing range	365°
Support width, front	8.0(5.2) m
Support width, rear	8.0(5.7) m
Min. unfolding height	9.9 m

Pump BSF.. .16H


Output	160/108 m ³ /h
Concrete pressure	8.5/13 MPa
Cylinder-Ø	230 mm
Cylinder stroke	2100 mm

Pump BSF.. .20H (特殊仕様)

Output	200 m ³ /h
Concrete pressure	85 bar
Cylinder-Ø	280 mm
Cylinder stroke	2100 mm
Weight over	33 tonnes


Options and accessories:

The extensive super equipment can be found in brochure BP 2311 GB. Refer to BP 1700 GB for further information on accessories.

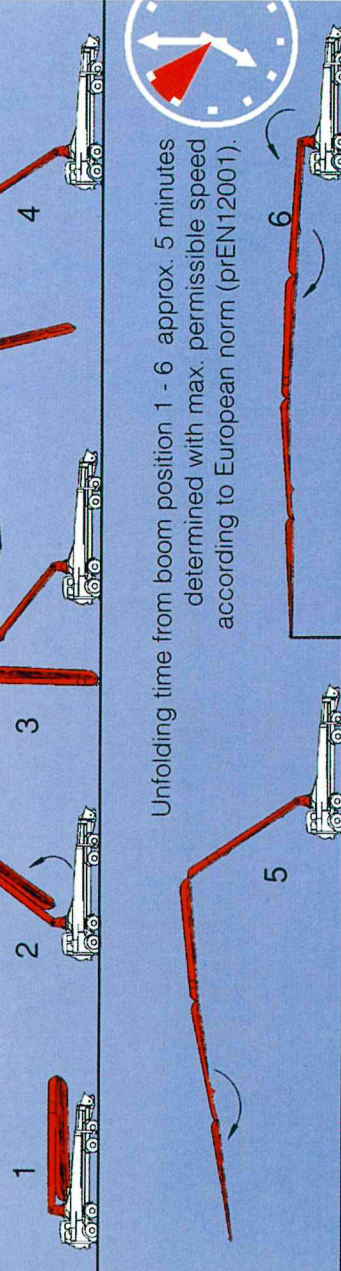Unfolding procedure

Unfolding time from boom position 1 - 6 approx. 5 minutes determined with max. permissible speed according to European norm (prEN12001).

The performance data are max. theor. The accessories shown are partly optional extras.

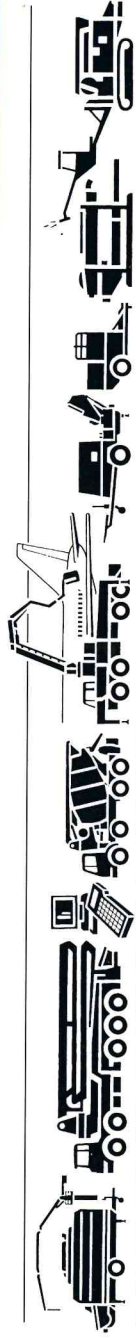

PMJ プツマイスタージャパン株式会社
Putzmeister Japan Co., Ltd.

〒342-0015 埼玉県吉川市中井70-1

TEL (0489) 84-1950 FAX (0489) 84-1955

e-mail: pmj01@mx1.alpha-web.ne.jp